


SHORTENING CLUTCH CLEVIS - LOCKING CLEVIS

Lockable Clutches have the advantage of shortening a Chain Sling without loss of the working load limit. The clevis allows easy connection to Chain with the added safety of a Chain locking device to prevent the Chain to dislodge from the hook.

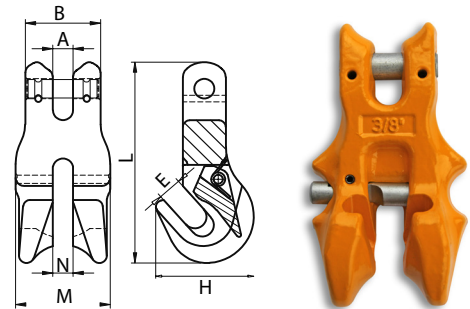

- Marked with Chain size, product ID, grade with manufacture quality mark
- Manufactured from G80 alloy steel with a safety factor of 4 to 1.
- Conforms to AS3776, Test Certificates available upon request.
- Used in in-line set-up

| CODE | SIZE (mm) | WLL (tonne) | WEIGHT (kg) | DIMENSIONS (mm) | | | | | |
|--------|--------------|----------------|----------------|--------------------|----|----|----|----|-----|
| | | | | A | B | C | D | E | F |
| 254308 | 7.1/8.0 | 2 | 0.5 | 10 | 10 | 10 | 10 | 24 | 56 |
| 254310 | 10 | 3.2 | 0.9 | 12 | 12 | 12 | 12 | 28 | 66 |
| 254313 | 13 | 5.3 | 2.1 | 15 | 15 | 16 | 16 | 39 | 88 |
| 254316 | 16 | 8 | 3.7 | 18 | 21 | 19 | 19 | 48 | 103 |
| 254320 | 20 | 12.5 | 5.7 | 22 | 23 | 23 | 21 | 55 | 132 |