


SHORTENING CLUTCH CLEVIS - NO LOCKING

Shortening Clutches have the advantage of shortening a Chain Sling without loss of the working load limit of the sling. The Clevis allows easy connection to Chain. Not recommended for use as a bottom fitting of sling for back-hooking and reeving applications.

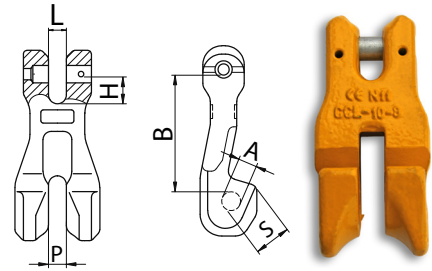

- Marked with Chain size, product ID, grade with manufacture quality mark
- Manufactured from G80 alloy steel with a safety factor of 4 to 1.
- Conforms to AS 3776, Test Certificates available upon request.

CODE	CHAIN SIZE (mm)	WLL (tonne)	WEIGHT (kg)	DIMENSIONS (mm)					
				A	B	P	L	H	S
254306	6	1.1	0.17	8	44	7.5	7.5	10.3	12
254307	7,8	2	0.41	10.5	61.7	9.5	9.5	14	17
254310	10	3.2	0.97	12.4	92	13	13	18.4	28
254313	13	5.3	2	16	115	16.5	16.5	22.7	34.5
254316	16	8	3.32	19.5	143	21	21	28.5	40
254320	18,20	12.5	6.2	23	152	23.5	23.5	33.6	46
254322	22	15	8.5	26	195	25.5	25.5	39	57.5